



Smart LED Lighting

35W

LED Retrofit Kits



Suitable for Outdoor Pole/Arm-Mounted Area and Roadway Luminaires.

Features & Benefits:

- Built-in Surge Suppressors & Transient Protection
- High Power Factor UL Listed LED Driver
- 5-Years / 50,000 Hours (*) Warranty
- Bright • High CRI
- Low THD



Model	Product	Size	Power	Flux	Equivalent
LRK-35W-57KC	35W 5,700K LED Retrofit Kit	<u>LED Engine</u> (L) 4¾" (W) 4¾" (D) 1¾"	35.6W	3,555 Lumen	100/150W MH or HPS



• Rated Voltage: 120-277Vac ~50/60Hz • P.F. > 0.9 • >100lm/W • CRI ≈ 70 •
 •(*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • Beam Angle 90° • Pigtail Wire/Cable LED Driver to Mains •




Smart LED Lighting

35W

LED Retrofit Kits

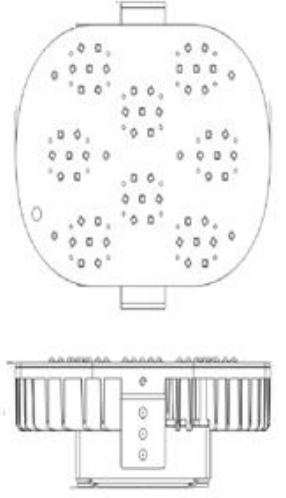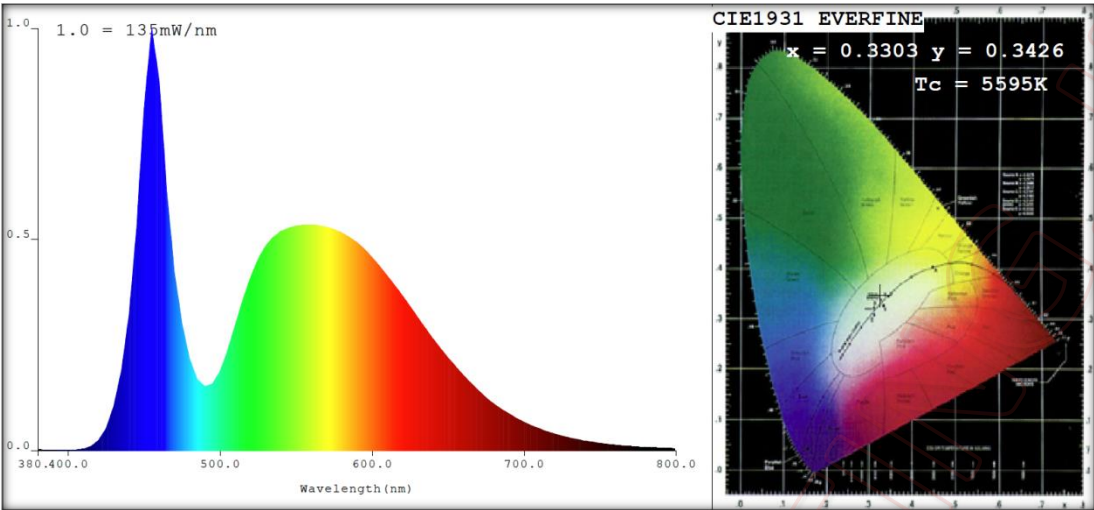

Size / Dimensions
LED Engine
 (L) 4¾" (W) 4¾"
 (D) 1¾"

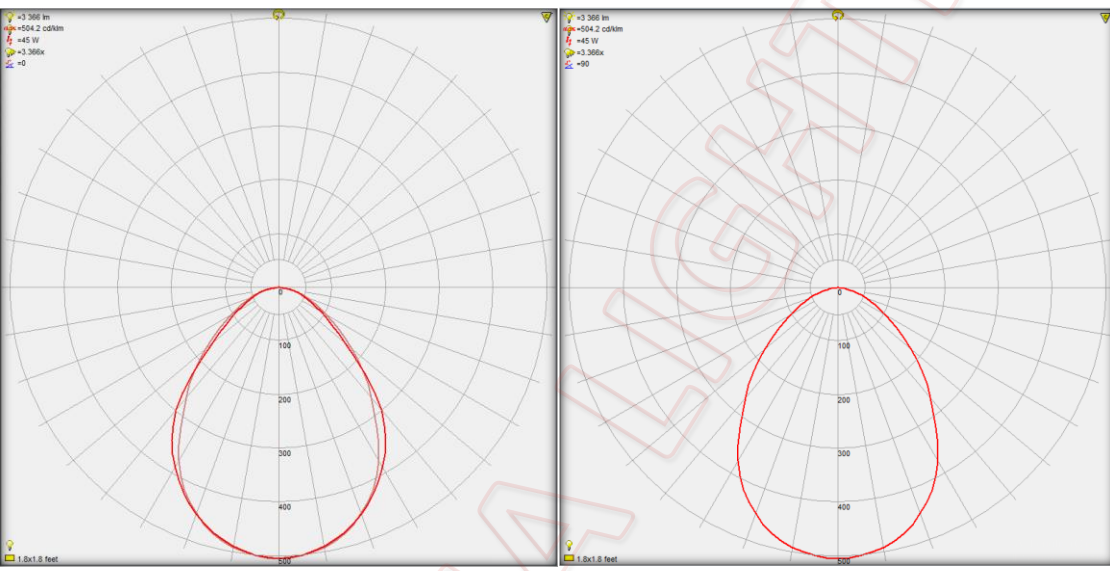

Model	Product	Power	Equivalent
LRK-35W-57KC	35W 5,700K LED Retrofit Kit	35.6W	100W/150W MH &/or HPS Lamp
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	35.6W Max. P.F. > 0.9	>100 lm/W	3,555 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ≈ 70	5,700K CCT ±10%	90°	50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.