



# Vapor Tight LED Fixture



## LED Parking Garage Luminaires

- 5-Years / 50,000 Hours Warranty(\*) •
- Bright, High CRI • High Lumen Output •
- Built-in Surge Suppression & Protection •
- High Power Factor • Low THD • Self Ballasted •
- IP65(##) Suitable for Damp & Wet Locations •



Model	Product	Size	Power	Flux	Equivalent
VPL-4FT-30W-55K	LED Parking Garage Luminaire 4ft. 30W 5500K	50" x 7" x 4" (128x18x10 CM)	32W Max.	4,200 Lumen	2 x F32T8/12 (4ft. 32W ea.)
VPL-4FT-40W-55K	LED Parking Garage Luminaire 4ft. 40W 5500K	50" x 7" x 4" (128x18x10 CM)	43W Max.	5,600 Lumen	2 x F54T5HO (4ft. 54W ea.)
VPL-4FT-50W-55K	LED Parking Garage Luminaire 4ft. 50W 5500K	50" x 7" x 4" (128x18x10 CM)	54W Max.	7,000 Lumen	2 x F54T5HO (4ft. 54W ea.)

- 120-277Vac ~50/60Hz • Pigtail Wire • P.F. > 0.9 • THD < 20% • ~140 lm/W • CRI ≈ 80 • (##) IP65 ≈ NEMA Enclosure Rating 4 •
- Select "55K" for CCT 5500K, "40K" for 4000K, "30K" for 3000K; ±10% • (\*) Rated Life 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>[A]</sub> 25°C Max. •



Smart LED Lighting

# Vapor Tight LED Fixture



## LED Parking Garage Luminaire



**“Before” (18fc)  
2xF32T8**

**&**

**“After” (34fc)  
LED 50W**

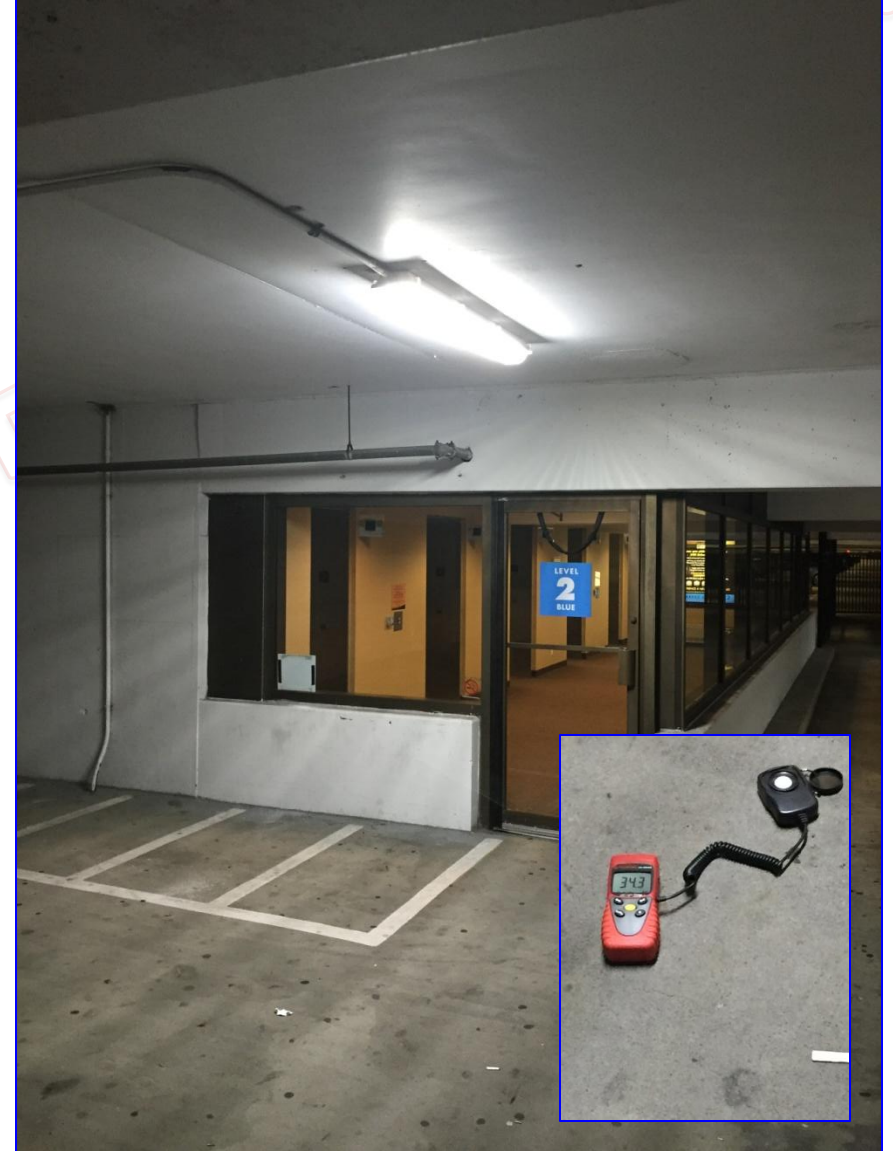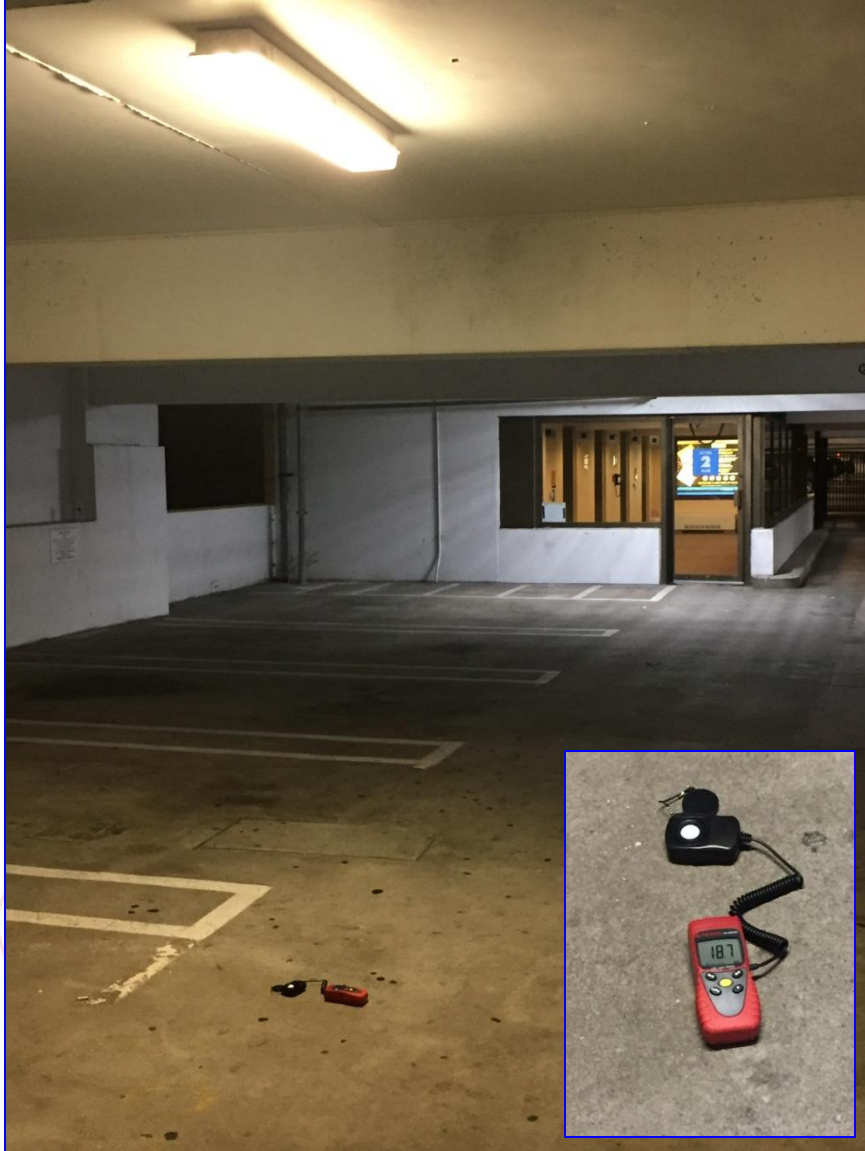

RIGHT

160312v2