



100W UFO High Bay LED Fixtures

**LED High-Bay Luminaires for
Commercial & Industrial Buildings
Dust & Water Proof**

Features & Benefits:

- 5-Years | 50,000 Hours Warranty^(*)
- High CRI • High Lumen Output
- High Power Factor • Low THD
- Directive 60°/90° Beam Angle
- IP65 – Dust & Water Proof
- Built-in Surge Suppression



Powered by
**PHILIPS
LUMILEDS**

45°/60°/90°/120° Beam Angle
available on request

IP65 ≈ NEMA Enclosure Rating 4




Model	Product	Size	Power	Flux	Eqv.
HBF-100W-55K-60d-277V	100W Hi-Bay LED Fixture 5,500K 60°	Ø 11" x 4½"	100W	13,000lm	400W


- "277V": 120-277Vac ~50/60Hz • P.F. > 0.95 • THD < 20% • Chain Hook + Pigtail Wire/Cable •
- (*) Rated Life 50,000 Hrs. (L₇₀ B₅₀) at T_A 25°C Max. • (#) IP65 ≈ Equal to NEMA Enclosure Rating 4 •
- Color Temp. (CCT) 5500K ±10% • ~130lm/W • CRI ≈ 80 • "Eqv." ÷ Equivalence to Metal Halide Lamps Wattage •



100W Hi-Bay LED Fixture

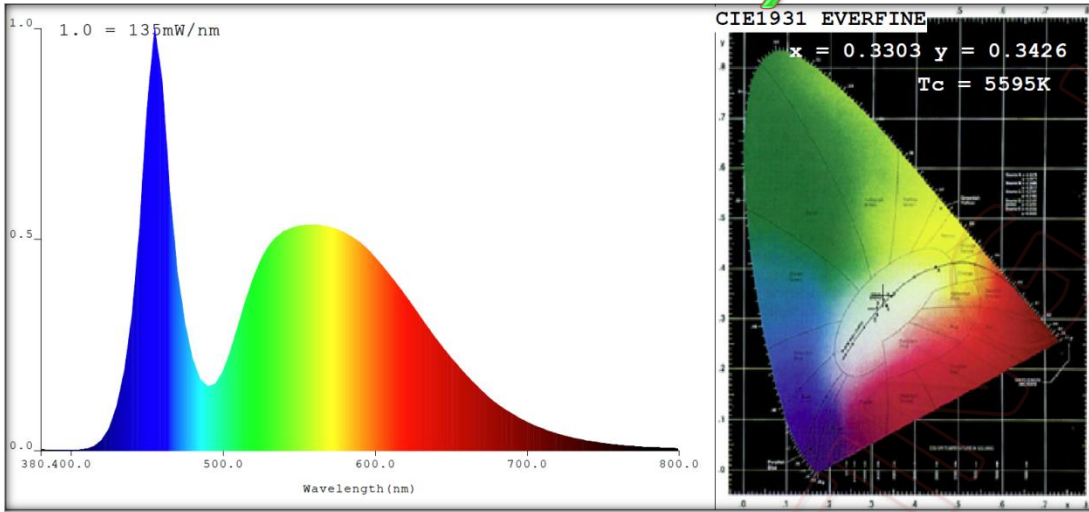

Size / Dimensions
 Ø 4½" (dia.)
 L 11" (MOL)

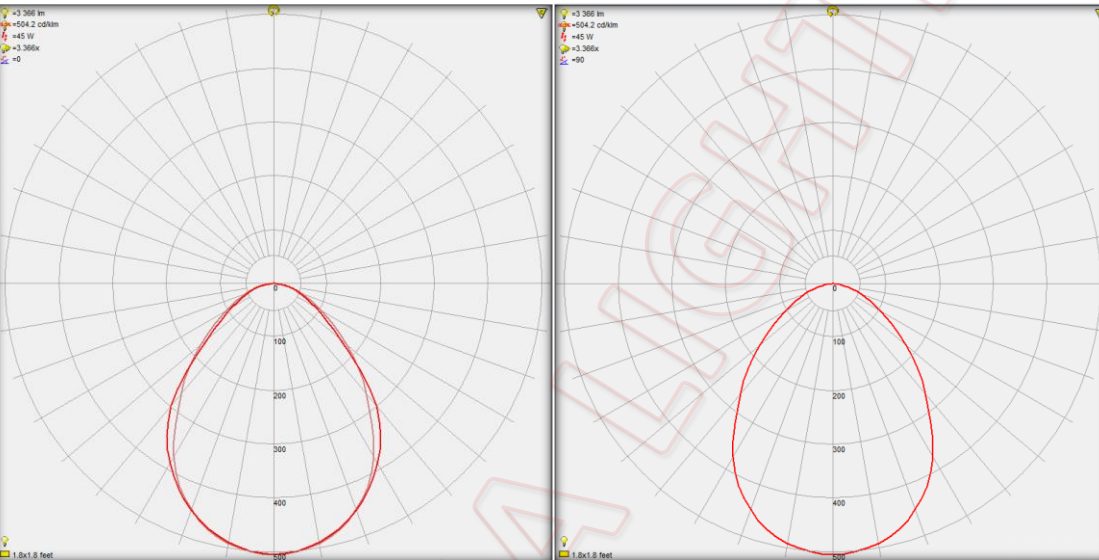

Model	Product	Power	Equivalent
HBF-100W-55K-xxd-277V HBF-100W-55K-xxd-480V	Hi-Bay LED Fixture	100W	400W MH Lamp High-Bay Light Fixture
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac or 208-480Vac ~50/60Hz	100W Max. P.F. ≈ 0.97	~130 lm/W	13,000 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ÷ 75~80	CCT 5500K ±10%	60° or 90° Options	50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.