



# 2x2' 40W CCT 5000K LED Lay-in Troffer

Luminaires for Ambient Lighting of Interior Commercial Spaces

- Built-in Surge Suppressors & Protection •
- Bright • High CRI • High Lumen Output •
- High Power Factor • Self Ballasted •
- Rated Life 50,000 Hours (\*) •



LM79  
LM80  
TESTED




- Simple Installation • High Lumen per Watt • Rugged Design •

Model	Product	Power	Flux	Equivalent *
T-BAR-2x2FT-40W-50K	T-Bar 2x2' LED Fixture 40W 5000K 100~277V	40W	5,200 Lumen	3~4 x F17T8 (2ft., 17W ea.)  2 x F32T8 (4ft., 32W ea.)  2 x FB32T8 (U-Bent, 32W ea.)

- 120-277Vac ~50/60Hz • Pigtail Wire/Cable • P.F. > 0.9 • ~130 lm/W • CRI ≈ 80 •
- (\*) Rated Life > 50,000 Hrs. (L<sub>70</sub> B<sub>50</sub>) at T<sub>[A]</sub> 25°C Max. •
- CCT 5500K (55K) ±10% •




# 2x2' 40W LED Troffer

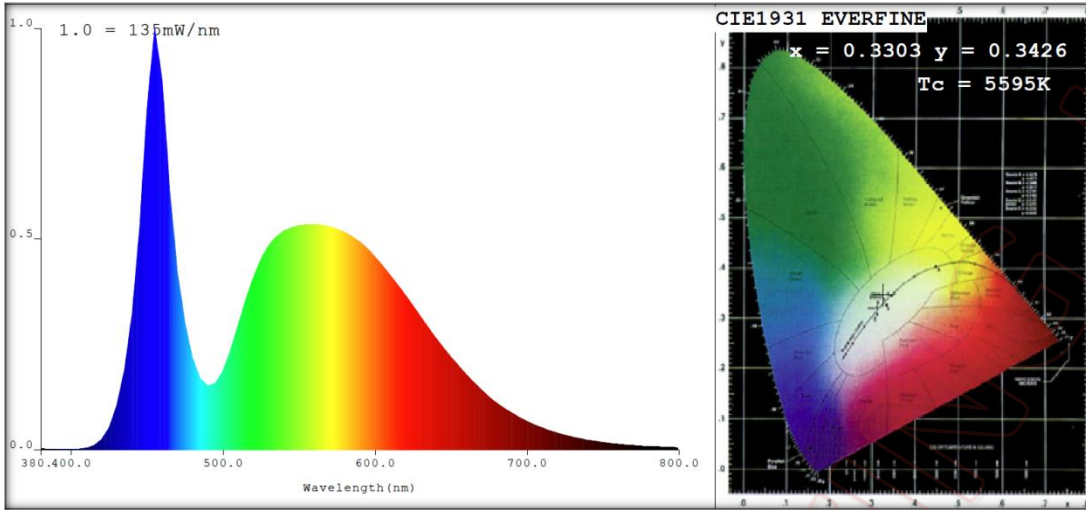

**Slim & Bright**



**Size / Dimensions**  
**L = 24" (60cm)**  
**W = 24" (60cm)**  
**T = 1 5/8" (4cm)**

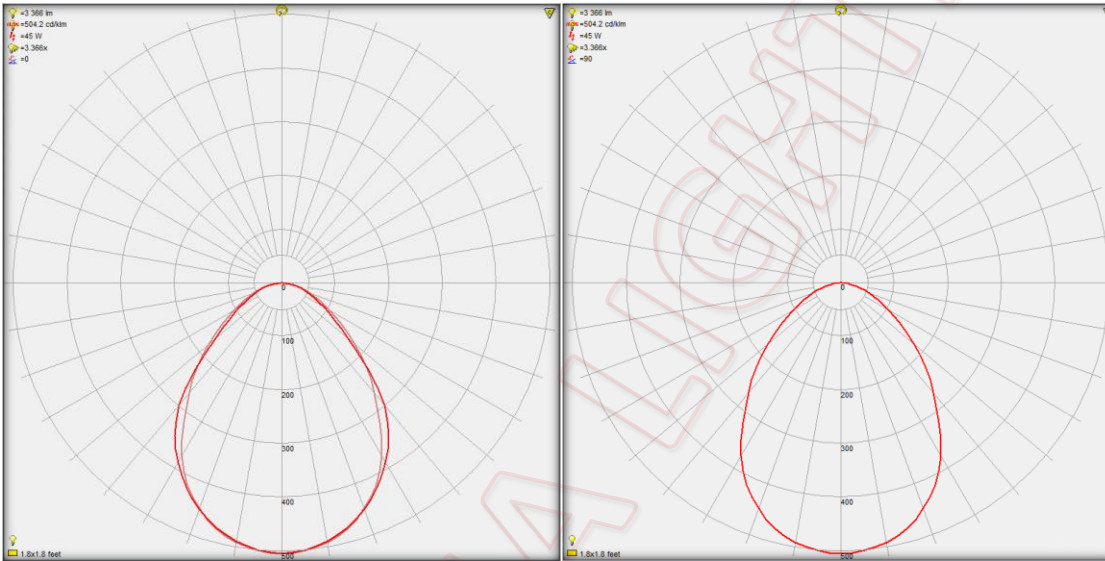

Model	Product	Power	Equivalent
T-BAR-2x2FT-40W-xxK	T-Bar 2x2' Lay-in Troffer	40W	T8/T12 U-Bent Tube
<b>Input Voltage</b>	<b>Power/Power Factor</b>	<b>Efficacy</b>	<b>Flux</b>
120-277Vac ~50/60Hz	40W Max. P.F. ≈ 0.94	~130 lm/W	5,200 Lumen
<b>Color Rendering</b>	<b>Color Temperature</b>	<b>Beam Angle</b>	<b>Life</b>
CRI ÷ ~80	3000K, 4000K, 5000K CCT ±10%	120°	5-Years / 50,000 Hours (L <sub>70</sub> B <sub>50</sub> ) T <sub>[A]</sub> 25°C Max.