



2x4' 50W LED Lay-in Troffer

Luminaires for Ambient Lighting of Interior Commercial Spaces

- Built-in Surge Suppressors & Protection •
- Bright • High CRI • High Lumen Output •
- High Power Factor • Self Ballasted •
- Rated Life 50,000 Hours (*) •



Slim & Bright



Available in CCT 3,000K – 4,000K – 5,000K ±10%



- Simple Installation • High Lumen per Watt • Rugged Design •

Model	Product	Power	Flux	Equivalent
T-BAR-2x4FT-50W-40K	T-Bar 2x4' LED Fixture 50W 4000K 100~277V	50W	6,500 Lumen	Comparable to T8/T12 Fluorescent Tubes: 3~4 x F32T8 (4ft., 32W ea.) 3~4 x F36T12 (4ft., 36W ea.)

- 120-277Vac ~50/60Hz • Pigtail Wire/Cable • P.F. > 0.9 • ~130 lm/W • CRI >80 •
- (*) Rated Life > 50,000 Hrs. (L₇₀ B₅₀) at T_[A] 25°C Max. •
- CCT 5000K (55K), 4000K (40K), 3000K (30K) ±10% •



2x4' 50W LED Troffer

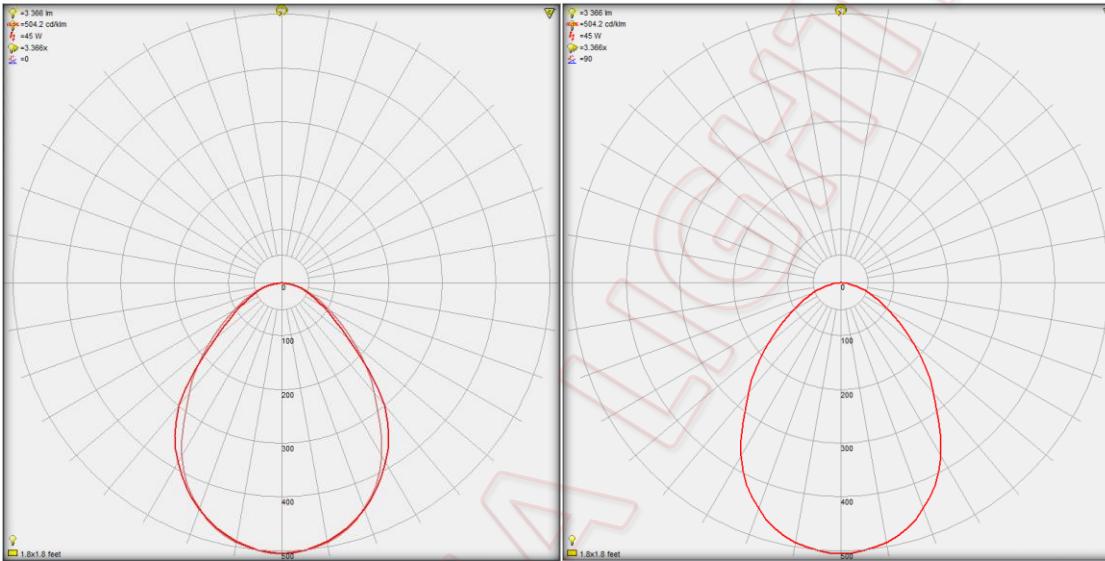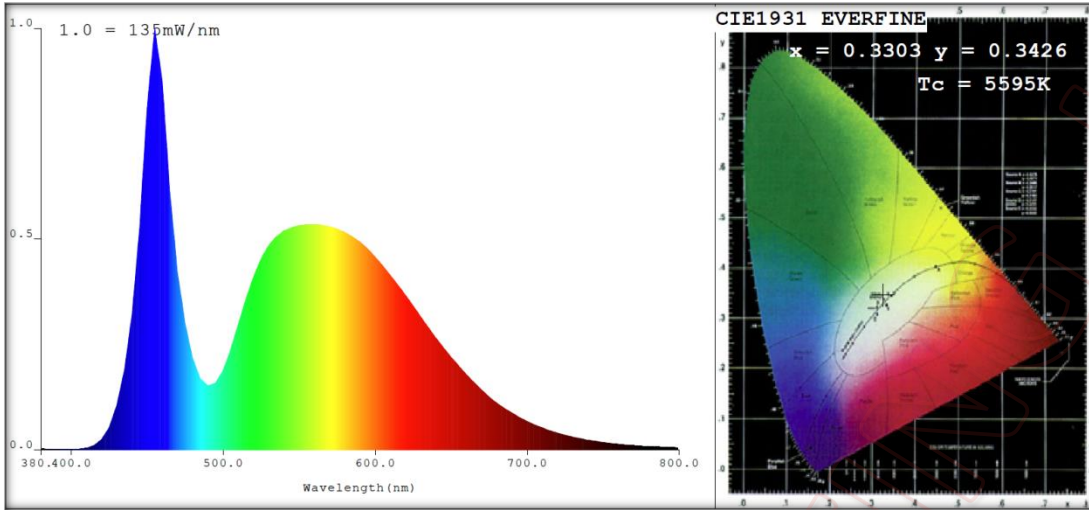

Model	Product	Power	Equivalent
T-BAR-2x4FT-50W-xxK	T-Bar 2x2' Lay-in Troffer	50W	T8/T12 FL Tube
Input Voltage	Power/Power Factor	Efficacy	Flux
120-277Vac ~50/60Hz	50W Max. P.F. ≈ 0.97	~130 lm/W	6,500 Lumen
Color Rendering	Color Temperature	Beam Angle	Life
CRI ÷ >80	3000K, 4000K, 5000K CCT ±10%	120°	5-Years / 50,000 Hours (L ₇₀ B ₅₀) T _[A] 25°C Max.